



Replacing LCD screen

Written By: Felice Suglia






TOOLS:




- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — accumulator

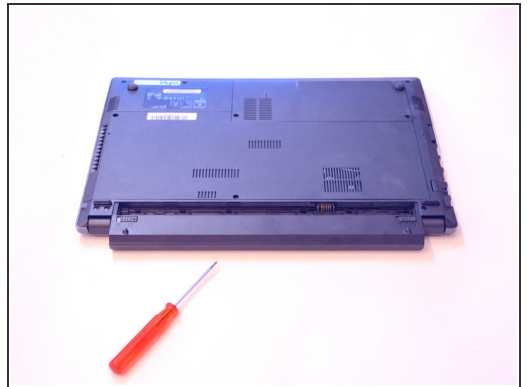



- Open the latch of the battery on the right side.
- Open the latch of the battery on the left side.
- Remove the battery.

Step 2 — LCD screen

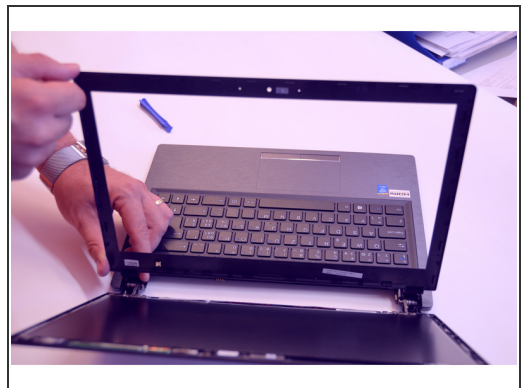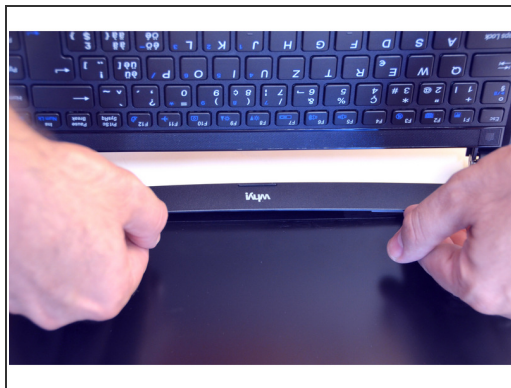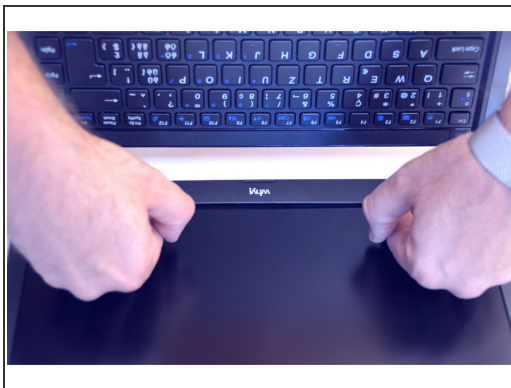




- Slide carefully the nail between the frame and the glass of the screen.
- Clips First remove the attachment points of the LCD screen frame.

Step 3

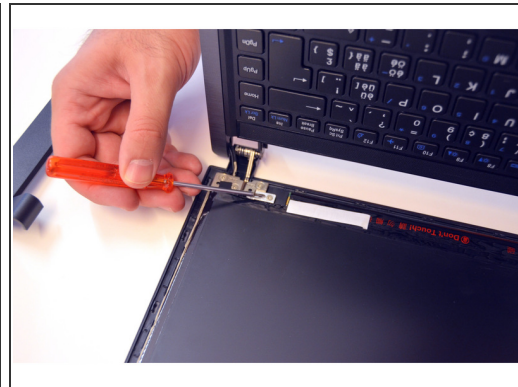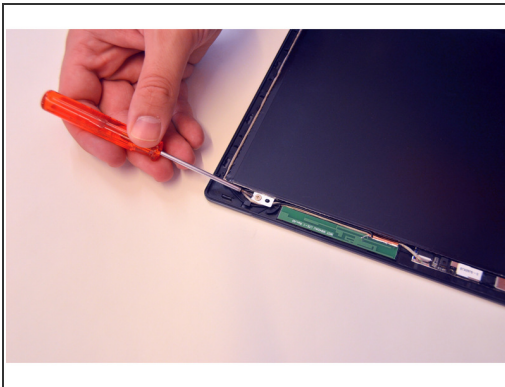


- Clear the LCD screen frame completely.
- Locations and loosen the two upper screws securing the LCD screen.
- Locations and loosen the two bottom screws securing the LCD screen.

Step 4

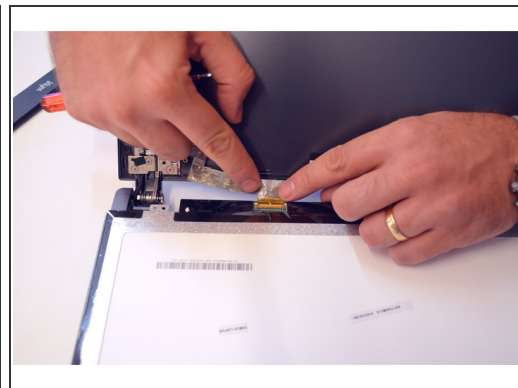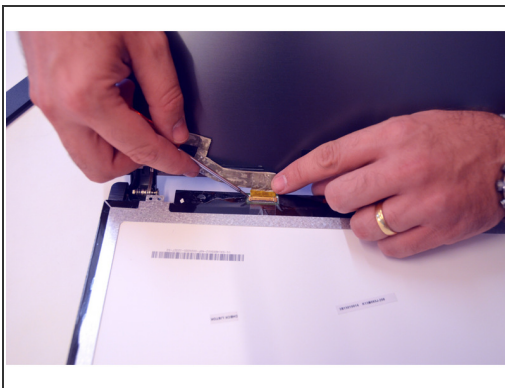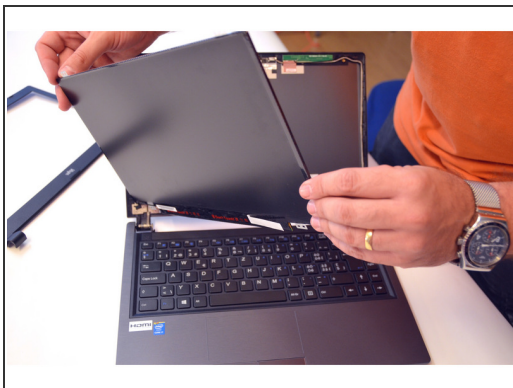

- Lay the LCD screen carefully on the keyboard.
- Places the plug of the LCD screen.
- Liberate the fastening cables.

Step 5

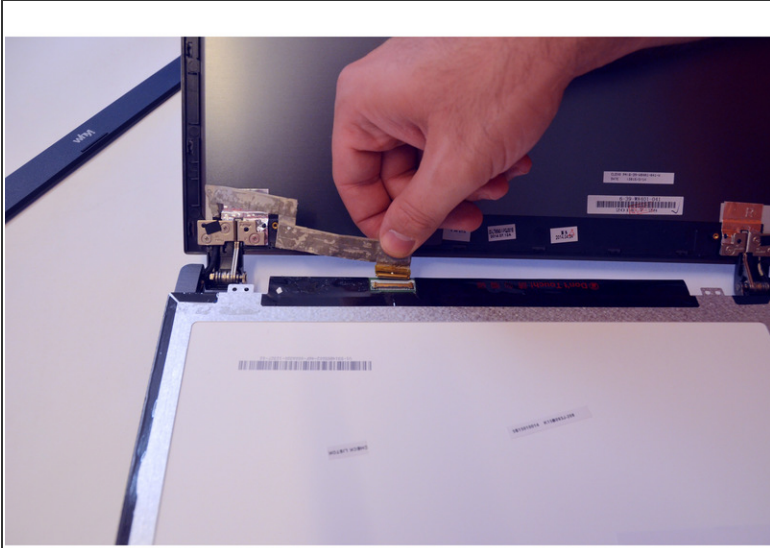

- Disconnect the cable from its connector.
- Then lift out the LCD screen.

Um das Gerät wieder zusammen zu bauen gehen Sie in umgekehrter Reihenfolge vor.

This document was last generated on 2017-06-19 03:42:49 PM.